

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 June 2006 (01.06.2006)

PCT

(10) International Publication Number  
**WO 2006/057703 A1**

(51) International Patent Classification:  
*H04N 7/26* (2006.01) *G06T 5/10* (2006.01)

(74) Agents: **TRIPOLI, Joseph, S.** et al.; Thomson Licensing Inc., Two Independence Way, Suite No. 200, Princeton, New Jersey 08540 (US).

(21) International Application Number:  
PCT/US2005/034723

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:  
26 September 2005 (26.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/630,640 23 November 2004 (23.11.2004) US

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **THOMSON LICENSING** [FR/FR]; 46, Quai A. Le Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **GOMILA, Cristina** [ES/US]; 25 C Chestnut Court, Princeton, New Jersey 08540 (US). **LLACH, Joan** [ES/US]; 25 C Chestnut Court, Princeton, New Jersey 08540 (US). **COOPER, Jeffrey, Allen** [US/US]; 11 Toth Lane, Rocky Hill, New Jersey 08553 (US).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOW-COMPLEXITY FILM GRAIN SIMULATION TECHNIQUE

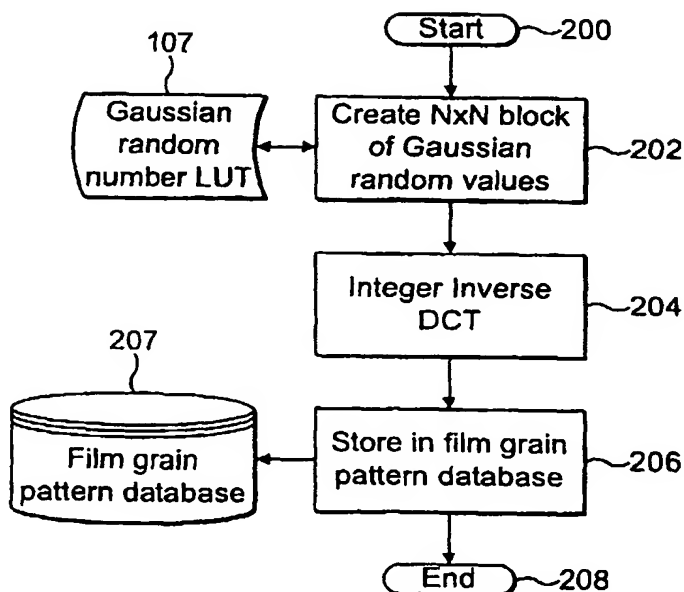

(57) Abstract: The simulation of film grain in a video image occurs by first creating a block (i.e., a matrix array) of transformed coefficients for a set of cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  $f_{VH}$  associated with a desired grain pattern. (The cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  $f_{VH}$  represent cut-off frequencies, in two dimensions, of a filter that characterizes the desired film grain pattern). The block of transformed coefficients undergoes an inverse transform to yield a bit-accurate film grain sample and the bit accurate sample undergoes scaling to enable blending with a video signal to simulate film grain in the signal.

-1-

## LOW-COMPLEXITY FILM GRAIN SIMULATION TECHNIQUE

### CROSS-REFERENCE TO RELATED APPLICATIONS

5           This application claims priority under 35 U.S.C. 119(e) to U.S. Provisional Patent Application Serial No 60/630640, filed November 23, 2004, the teachings of which are incorporated herein.

### TECHNICAL FIELD

10           This invention relates to a technique for simulating film grain in an image.

### BACKGROUND OF THE INVENTION

15           Motion picture films comprise silver-halide crystals dispersed in an emulsion, which is coated in thin layers on a film base. The exposure and development of these crystals form the photographic image consisting of discrete tiny particles of silver. In color negatives, the silver undergoes chemical removal after development and tiny blobs of dye occur on the sites where the silver crystals form. These small specks of dye are commonly called 'grain' in color film.

20           Grain appears randomly distributed on the resulting image because of the random formation of silver crystals on the original emulsion. Within a uniformly exposed area, some crystals develop after exposure while others do not.

          Grain varies in size and shape. The faster the film, the larger the clumps of silver formed and blobs of dye generated, and the more they tend to group together in random

25           patterns. The grain pattern is typically known as 'granularity'. The naked eye cannot distinguish individual grains, which vary from 0.0002 mm to about 0.002 mm. Instead, the eye resolves groups of grains, referred to as blobs. A viewer identifies these groups of blobs as film grain. As the image resolution becomes larger, the perception of the film grain becomes higher. Film grain becomes clearly noticeable on cinema and high-definition

30           images, whereas film grain progressively loses importance in SDTV and becomes imperceptible in smaller formats.

          Motion picture film typically contains image-dependent noise resulting either from the physical process of exposure and development of the photographic film or from the

-2-

subsequent editing of the images. The photographic film possesses a characteristic quasi-random pattern, or texture, resulting from physical granularity of the photographic emulsion. Alternatively, a similar pattern can be simulated over computed-generated images in order to blend them with photographic film. In both cases, this image-dependent noise is referred to as grain. Quite often, moderate grain texture presents a desirable feature in motion pictures. In some instances, the film grain provides visual cues that facilitate the correct perception of two-dimensional pictures. Film grain is often varied within a single film to provide various clues as to time reference, point of view, etc. Many other technical and artistic uses exist for controlling grain texture in the motion picture industry. Therefore, preserving the grainy appearance of images throughout image processing and delivery chain has become a requirement in the motion picture industry.

Several commercially available products have the capability of simulating film grain, often for blending a computer-generated object into a natural scene. Cineon® from Eastman Kodak Co, Rochester New York, one of the first digital film applications to implement grain simulation, produces very realistic results for many grain types. However, the Cineon® application does not yield good performance for many high speed films because of the noticeable diagonal stripes the application produces for high grain size settings. Further, the Cineon® application fails to simulate grain with adequate fidelity when images are subject to previous processing, for example, such as when the images are copied or digitally processed.

Another commercial product that simulates film grain is *Grain Surgery*™ from Visual Infinity Inc., which is used as a plug-in of Adobe ® After Effects ®. The *Grain Surgery*™ product appears to generate synthetic grain by filtering a set of random numbers. This approach suffers from disadvantage of a high computational complexity.

None of these past schemes solves the problem of restoring film grain in compressed video. Film grain constitutes a high frequency quasi-random phenomenon that typically cannot undergo compression using conventional spatial and temporal methods that take advantage of redundancies in the video sequences. Attempts to process film-originated images using MPEG-2 or ITU-T/ISO H.264 compression techniques usually result in either an unacceptably low degree of compression or complete loss of the grain texture.

Thus, there exists a need for a technique simulating film grain, especially a technique that affords relatively low complexity.

-3-

## BRIEF SUMMARY OF THE INVENTION

Briefly, there is provided a method in accordance with the present principles for simulating film grain. The method commences by creating a block (i.e., a matrix array) of transformed coefficients responsive to a band pass region associated with a desired grain pattern. (The band pass region is defined by a set of cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$ , and  $f_{VH}$  that represent cut-off frequencies (in two dimensions) of a filter that characterizes the desired film grain pattern). The block of transformed coefficients undergoes an inverse transform to yield a bit-accurate film grain sample. If desired, the bit accurate sample can undergo scaling to enable blending with a video signal to simulate film grain in the signal.

In practice, generation of the block of transformed coefficients occurs as follows. For each coefficient at coordinates  $(x,y)$  in the block, where  $x$  and  $y$  are integers designating the row and column, respectively, a random value ( $r$ ) is obtained, if each of the  $x$  and  $y$  coordinates lies within the band pass of the cut frequencies  $f_{HL}$  and  $f_{HH}$  and  $f_{VL}$  and  $f_{VH}$ , respectively. The value of the coefficient at the coordinates  $(x,y)$  becomes the random value  $r$ . The process is repeated for every entry in the block.

The film grain simulation technique of the present principles affords reduced complexity as compared to prior-art transform-based approaches for film grain simulation by avoiding the computation of a direct transform. The technique also reduces the memory requirements of database-based approaches by storing a small set of transformed coefficients instead of film grain patterns. The present method has applicability to HD DVD systems, BD ROM systems as well as to satellite broadcasting, among other uses.

## DETAILED DESCRIPTION OF THE DRAWINGS

FIGURE 1 depicts a block schematic diagram of the combination of a transmitter and receiver in a film Grain Processing chain useful for practicing the technique of the present principles;

FIGURE 2 depicts, in flow chart form, the steps of a first method for creating a set of transformed coefficients for simulating film grain in accordance with the present principles;

FIGURE 3 depicts, in flow chart form, the steps of a second method for creating a set of transformed coefficients for simulating film grain in accordance with the present principles; and

-4-

FIGURE 4 depicts, in flow chart form, the steps of a method for creating a database of film grain patterns in accordance with the present principles.

#### DETAILED DESCRIPTION

5

To best understand the technique of the present principles for simulating film grain using a set of cut frequencies that characterize the film grain pattern, a brief overview of film grain simulation will prove helpful. FIGURE 1 depicts a block schematic diagram of a transmitter 10, which receives an input video signal and, in turn, generates a compressed video stream at its output. In addition, the transmitter 10 also generates information indicative of the film grain (if any) present in the sample. In practice, the transmitter 10 could comprises part of a head-end array of a cable television system, or other such system that distributes compressed video to one or more downstream receivers 11, only one of which is shown in FIG. 1. The transmitter 10 could also take the form of encoder that presents media like DVDs. The receiver 11 decodes the coded video stream and simulates film grain in accordance with the film grain information and decoded video, both received from the transmitter 10 or directly from the media itself in the case of a DVD or the like, to yield an output video stream that has simulated film grain. The receiver 11 can take the form of a set-top box or other such mechanism that serves to decode compressed video and simulate film grain in that video.

20

The overall management of film grain requires the transmitter 10 (i.e., the encoder) provide information with respect to the film grain in the incoming video. In other words, the transmitter 10 "models" the film grain. Further the receiver 11 (i.e., decoder) simulates the film grain according to the film grain information received from the transmitter 10. The transmitter 10 enhances the quality of the compressed video by enabling the receiver 11 to simulate film grain in the video signal when difficulty exists in retaining the film grain during the video coding process.

25

In the illustrated embodiment of FIG. 1, the transmitter 10 includes a video encoder 12 which encodes the video stream using any of the well known video compression techniques such as the ITU-T Rec. H.264 | ISO/IEC 14496-10 video compression standard. Optionally, a film grain remover 14, in the form of a filter or the like depicted in dashed lines in FIG. 1, could exist upstream of the encoder 12 to remove any film grain in the incoming video stream prior to encoding. To the extent that the incoming video contains no film grain, no need

30

-5-

would exist for the film grain remover 14.

A film grain modeler 16 accepts the input video stream, as well as the output signal of the film grain remover 14 (when present). Using such input information, the film grain modeler 16 establishes the film grain in the incoming video signal. In its simplest form, the film grain modeler 16 could comprise a look up table containing film grain models for different film stocks. Information in the incoming video signal would specify the particular film stock used to originally record the image prior to conversion into a video signal, thus allowing the film grain modeler 16 to select the appropriate film grain model for such film stock. Alternatively, the film grain modeler 16 could comprise a processor or dedicated logic circuit that would execute one or more algorithms to sample the incoming video and determine the film grain pattern that is present.

The receiver 11 typically includes a video decoder 18 that serves to decode the compressed video stream received from the transmitter 10. The structure of the decoder 18 will depend on the type of compression performed by the encoder 12 within the transmitter 10. Thus, for example, the use within the transmitter 10 of an encoder 12 that employs the ITU-T Rec. H.264 | ISO/IEC 14496-10 video compression standard to compress outgoing video will dictate the need for an H.264-compliant decoder 18. Within the receiver 11, a film grain simulator 20 receives the film grain information from the film grain model 16. The film grain simulator 20 can take the form of a programmed processor, or dedicated logic circuit having the capability of simulating film grain for combination via a combiner 22 with the decoded video stream.

Film grain simulation aims to synthesize film grain samples that simulate the look of the original film content. As described, film grain modeling occurs at the transmitter 10 of FIG. 1, whereas film grain simulation occurs at the receiver 11. In particular, film grain simulation occurs in the receiver 11 along with the decoding the incoming video stream from the transmitter 10 but upstream of the output of the decoded video stream. Note that the decoding process that occurs in the receiver 11 makes no use of images with added film grain. Rather, film grain simulation constitutes a post-processing method for synthesizing simulated film grain in the decoded images for display. For that reason, the ITU-T Rec. H.264 | ISO/IEC 14496-10 video compression standard contains no specifications regarding the film grain simulation process. However, film grain simulation requires information concerning the grain pattern in the incoming video signal, which information typically undergoes transmission in a Supplemental Enhancement Information (SEI) message when using the ITU-

T Rec. H.264 | ISO/IEC 14496-10 video compression standard as specified by the Amendment 1 (Fidelity Range Extensions) of that compression standard.

In accordance with the present principles, there is provided a low-complexity method for simulating film grain, which presupposes that the transformation used to simulate film grain is linear. The method of the present principles, which is practiced by the film grain simulator 20 of FIG. 1, generates a block of film grain in a process that includes the following three steps: (1) create a block of transformed coefficients in accordance with the cut-frequencies for a desired film grain pattern, (b) compute an inverse transform and (c) scale the resultant values. A more complete description of each process follows hereinafter.

#### Creating a block of transformed coefficients

The process of creating of a block of transformed coefficients takes as its input a set of cut frequencies characterizing a desired film grain pattern and yields a set of normalized random numbers. In a preferred embodiment, the normalized random numbers will follow a normalized Gaussian random distribution (independent and identically distributed Gaussian random variable samples with zero mean and unity variance) while the cut frequencies are transmitted in a film grain characteristics SEI message, as defined by the ITU-T Rec. H.264 | ISO/IEC 14496-10 standard [1].

In the illustrated embodiment, the creation of a block image B (e.g., a block of transformed coefficients of size  $N \times N$ ) in the frequency domain occurs in the manner illustrated in flow chart form in FIG. 2. The process begins at Start step 100 during which initialization occurs. Following step 100, step 102 occurs, commencing a loop which scans all coefficients of the  $N \times N$  block by setting a pair of running variables (x,y) to all possible values in the integer range of  $[0, N-1] \times [0, N-1]$ . The variables x and y each represent the x and y coordinates, respectively, of an entry in a block (i.e., a matrix array) of transformed coefficients produced by this process. During step 104, a check occurs whether the values of x and y lie within the band pass defined by the cut frequencies  $f_{HL}$  and  $f_{HH}$  and  $f_{VL}$  and  $f_{VH}$ . If so, step 106 occurs and a random number is generated and during step 108 the random number is assigned to the coefficient in the block at the x and y coordinates matching the current value of the running variables x and y, respectively. Step 104 illustrates a preferred embodiment of the checking of x and y values to decide whether or not they lie within the band pass defined by the cut frequencies, but other criteria are possible.

-7-

If the current values of  $x$  and  $y$  do not lie simultaneously within the band pass defined by the cut frequencies  $f_{HL}$  and  $f_{HH}$  and  $f_{VL}$  and  $f_{VH}$  of the desired film grain pattern, as transmitted in the SEI message, then the coefficient in the block associated with the current value of  $x$  and  $y$  is set to zero during step 110. Following either of steps 108 or 110, then step 112 occurs, and the running variables  $x$  and  $y$  are incremented, provided that  $x$  and  $y \leq N$  and execution branches to step 104. Otherwise, the loop ends during step 112 and the method finishes at End step 114.

The method for creating a block of transformed coefficients depicted in FIG. 2 can be described in a "for" computer program loop in the following manner:

10

```
for( y = 0; y < N; y++ )
```

```
    for( x = 0; x < N; x++ )
```

```
        if( ( x < fHL && y < fVL ) || x > fHH || y > fVH )
```

```
            B[ x ][ y ] = 0
```

15

```
        else
```

```
            B[ x ][ y ] = r
```

```
B[ 0 ][ 0 ] = 0
```

20

Note that  $f_{HL}$  and  $f_{VL}$  constitute the horizontal and vertical low cut frequencies, respectively;  $f_{HH}$  and  $f_{VH}$  constitute the horizontal and vertical high cut frequencies, respectively of the desired film grain pattern, and  $r$  constitutes a normalized random number. In practice, a Gaussian random number  $r$  could be generated from two independent, uniformly distributed random values, using the Box-Muller transformation specified by:

25

$$r = \sqrt{-2\ln(x_1)} \cdot \sin(2\pi x_2)$$

where  $\ln(\cdot)$  is the natural logarithm,  $\sin(\cdot)$  is the sine function,  $\pi$  is Archimedes's constant, and  $x_1$  and  $x_2$  are in the range of  $(0,1)$ , with 0 not included.

30

FIGURE 3 depicts an alternate preferred method for creating a block of transformed coefficients. The flow chart method of FIG. 3 includes almost all of the same steps as the method of FIG. 2 and therefore like reference numbers appear in FIG. 3 as in FIG. 2 to describe like steps. The method of FIG. 3 differs in the following respect. Instead of obtaining a random number during step 106 in FIG. 2 through mathematical computation, the



-8-

method of creating a block of transformed coefficients of FIG. 3 includes the step 105 of obtaining a random number from a look-up table 110 of previously computed Gaussian random numbers. Otherwise, the two methods practice the same steps.

Optionally, the block transformed coefficient generation methods of FIGS. 2 and 3 could force the coefficient at the position 0,0 (i.e., the DC coefficient) to become zero in order to ensure that after inverse transform, the signal will have zero mean. Large deviations from zero for the DC coefficient could cause large deviations in the average value of the resulting film grain block. As a consequence, when blending the film grain with the decoded image, blocks could show visible variations in their average value (i.e., the blocks could become either darker or brighter).

In the case when  $f_{HL}$  and  $f_{VL}$  both equal to zero, the creation of the block image B in the frequency domain can occur as follows:

```

for(y = 0; y < N; y++)
15   for( x = 0; x < N; x++)
        if( x > fHH || y > fVH )
            B[ x ][ y ] = 0
        else
            B[ x ][ y ] = r
20
B[ 0 ][ 0 ] = 0

```

Assuming also the ability to accomplish zero value initialization upon memory allocation of the block image, the previous method can be simplified to the following expression:

```

25
for( y = 0; y < N; y++)
    for( x = 0; x < N; x++)
        if( x <= fHH && y <= fVH )
            B[ x ][ y ] = r
30

```

Note that the processes described in FIGS. 2 and 3 make use of  $(f_{HH} - f_{HL} + 1) * (f_{VH} - f_{VL} + 1)$  normalized random values, thereby avoiding the filtering step that typically follows the computation of the forward transform of a block of normalized random numbers.

### Compute The Inverse Transform

Following generation of the block of transformed coefficients, computation of the  
 5 inverse transform occurs, typically according to the general formula:

$$b = a \cdot (C^T \times B \times C)$$

where  $a$  constitutes a scaling factor that compensates for intensity variation resulting from the  
 10 generation of the block of transformed coefficients. Typically, the scaling factor  $a$  can have a value of unity.

When using a DCT transform, computation of the transformation matrix  $C$  occurs as follows:

$$15 \quad C = \begin{pmatrix} c_{0,0} & \cdots & c_{0,N-1} \\ \vdots & \ddots & \vdots \\ c_{N-1,0} & \cdots & c_{N-1,N-1} \end{pmatrix}$$

$$c_{m,n} = k \cos\left(\frac{(2n+1)m\pi}{2N}\right)$$

$$k = \begin{cases} \sqrt{1/N} & \text{if } m = 0 \\ \sqrt{2/N} & \text{otherwise} \end{cases}$$

$$20 \quad \text{in this case, } a = \frac{1}{\|C\| \cdot \|C^T\|}.$$

### Scaling of the Inverse Transform Resultant Values

Following the creation of the block of transformed coefficients and computation of the  
 25 inverse transform of the block, the film grain simulation process of the present principles typically includes the step of scaling the film grain pattern to the appropriate film grain intensity, although such scaling not necessarily occur. For video coding applications, information about the film grain intensity typically undergoes transmission in the SEI message, as specified in the ITU-T Rec. H.264 | ISO/IEC 14496-10 standard.

-10-

The scaling process typically occurs in accordance in the following manner:

```
for(y = 0; y < N; y++ )  
    for( x = 0; x < N; x++)  
5         b[ x ][ y ] *= scaling_factor
```

This approach presents a tradeoff between complexity and memory requirements when compared to prior art methods. On one hand, the scaling method of the present principles reduces the complexity of transform-based approaches by avoiding computation of the direct  
10 transform and filtering in the frequency domain. On the other hand, the scaling method of the present principles reduces the memory requirements of database-based approaches by only storing a small set of transformed coefficients instead of complete film grain patterns.

The method of the present principles can serve to initialize a database of film grain patterns. In particular, the steps of creating a the block of transformed coefficients and  
15 computing the inverse transform of the block could serve to initialize a database of film grain patterns as illustrated in flow chart form in Figure 4. The method of FIG. 4 commences upon execution of Start step 200 whereupon initialization occurs. Thereafter, step 202 occurs with generation of the block of Gaussian random values, using either the method of FIG. 2, or the method of FIG. 3. When employing the block transform generation method of FIG. 3, each  
20 random number entry is obtained by accessing the Gaussian random number look-up table 107, as discussed previously. Following step 202, the block of Gaussian random values undergoes an inverse transform, typically via an Inverse Discrete Cosine Transform (IDCT) during step 204, along with the appropriate scaling. During step 206, the film grain patterns undergo storage in a database 207. Thereafter, the process ends at step 208. The process of  
25 FIG. 4 allows creation of the database 207 upon system initialization or reset, and enables storage in a conventional memory (usually SRAM memory).

The foregoing describes a technique for simulating film grain in an image that affords the advantage of low complexity.

-11-

## CLAIMS

- 1           1.     A method for simulating film grain, comprising the steps of:  
2           creating a block of transformed coefficients responsive to a band pass region  
3           associated with a desired film grain pattern; and  
4           establishing an inverse transform for the created block of transformed coefficients to  
5           yield a film grain sample.
- 1           2.     The method according to claim 1 wherein the block of block transformed  
2           coefficients is created by the steps of:  
3           (a) obtaining a value for each coefficient at coordinates (x, y) which is a random value  
4           for so long as x and y lie in the band pass defined by a set of cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  
5            $f_{VH}$ , but a zero otherwise;  
6           (b) setting the value of the coefficient at coordinates (x, y) to the obtained value; and  
7           (c) repeating steps (a) and (b) until a value is set for every coefficient in the block.
- 1           3.     The method according to claim 2 further comprising the step of setting the  
2           block coefficient at (0,0) to a zero value.
- 1           4.     The method according to claim 2 wherein each of the random values obtained for so  
2           long as x and y lie in the band pass defined by a set of cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  $f_{VH}$   
3           follows a Gaussian random distribution.
- 1           5.     The method according to claim 2 wherein each of the random values is  
2           obtained by accessing an entry from a pre-computed look-up table of random values.
- 1           6.     The method according to claim 1 further including the step of scaling the film  
2           grain sample.
- 1           7.     A method of creating a block of transformed coefficients used to simulate a  
2           desired film grain pattern, comprising the steps of:  
3           (a) obtaining a value for each coefficient at coordinates (x, y) which is a random value  
4           for so long as x and y lie in a band pass region defined by the cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and

-12-

5  $f_{VH}$ , but a zero otherwise;

6 (b) setting the value of the coefficient at coordinates (x, y) to the obtained value; and

7 (c) repeating steps (a) and (b) until a value is set for every coefficient in the block.

1

1 8. The method according to claim 7 further comprising the step of setting the  
2 block coefficient at (0,0) to a zero value.

1 9. The method according to claim 7 wherein each of the random values obtained  
2 for so long as x and y lie in a band pass region defined by the cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  
3  $f_{VH}$  follows a Gaussian random distribution.

1 10. The method according to claim 7 wherein each of the random values is  
2 obtained by accessing an entry from a pre-computed look-up table of random values.

1 11. The method according to claim 7 further including the step of establishing an  
2 inverse transform on the block of transformed coefficients.

1 12. The method according to claim 11 further including the step of scaling the  
2 inverse transform of the block of transformed coefficients to yield a pattern of film grain  
3 samples.

1 13. The method according to claim 12 further comprising the step of initializing a  
2 database of film grain patterns using a single block of transformed coefficients to create all  
3 possible film grain patterns.

1 14. The method according to claim 12 further comprising the step of initializing a  
2 database of film grain patterns using multiple blocks of transformed coefficients to create all  
3 possible film grain patterns.

1

1 15. Apparatus for simulating film grain, comprising one of a programmed  
2 processor and logic circuit for (1) creating a block of transformed coefficients responsive to a  
3 band pass region associated with a desired film grain pattern; (2) establishing an inverse  
4 transform for the created block of transformed coefficients; and (3) scaling the block of

-13-

5 inversely transformed coefficients to create a simulated pattern of film grain.

1        16.     The apparatus according to claim 15 wherein the one of the programmed  
2 processor or logic circuit creates the block of block transformed coefficients by (a) obtaining a  
3 value for each coefficient at coordinates (x, y) which is a random value for so long as x and y  
4 lie in a band pass defined by the cut frequencies  $f_{HL}$ ,  $f_{VL}$ ,  $f_{HH}$  and  $f_{VH}$ , but a zero otherwise; (b)  
5 setting the value of the coefficient at coordinates (x, y) to the obtained value, and (c) repeating  
6 (a) and (c) until a value is set for every coefficient in the block.

1        17.     The apparatus according to claim 15 wherein the one of the programmed  
2 processor or logic circuit creates the block of block transformed coefficients by setting the  
3 block coefficient at (0,0) to a zero value.

1        18.     The apparatus according to claim 15 wherein the one of the programmed  
2 processor or logic circuit creates the block of block transformed coefficients such that each of  
3 the random values obtained for so long as  $x \geq f_{HL}$  or  $y \geq f_{VL}$  and  $x \leq f_{HH}$  and  $y \leq f_{VH}$   
4 follows a Gaussian random distribution.

1        19.     The apparatus according to claim 15 wherein the one of the programmed  
2 processor or logic circuit obtains each of the random values by accessing an entry from a pre-  
3 computed look-up table of random values.

1        20.     Apparatus for simulating film grain, comprising:  
         means for creating a block of transformed coefficients responsive to a band pass  
         region associated with a desired film grain pattern;  
         means for establishing an inverse transform for the created block of transformed  
5 coefficients; and  
         means for scaling the block of transformed coefficients to create a simulated pattern of  
film grain.

1 / 3

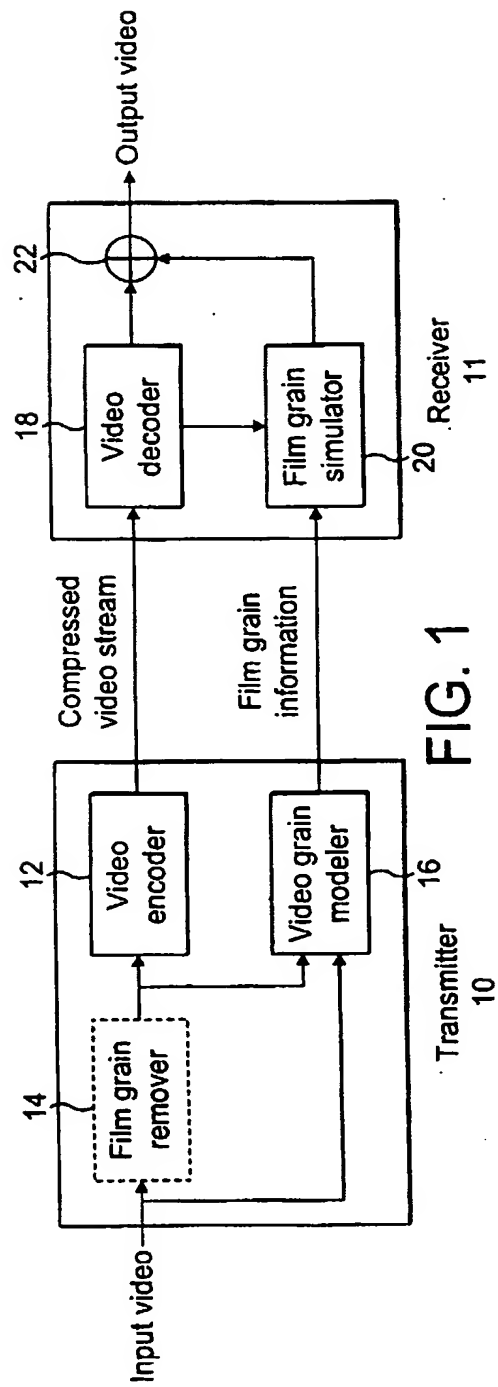


FIG. 1

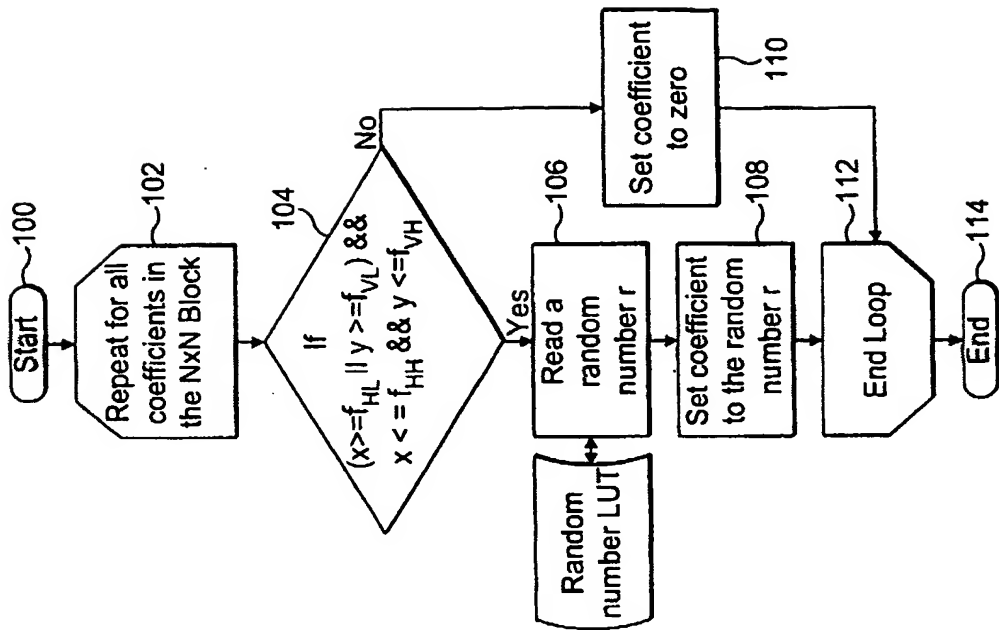


FIG. 3

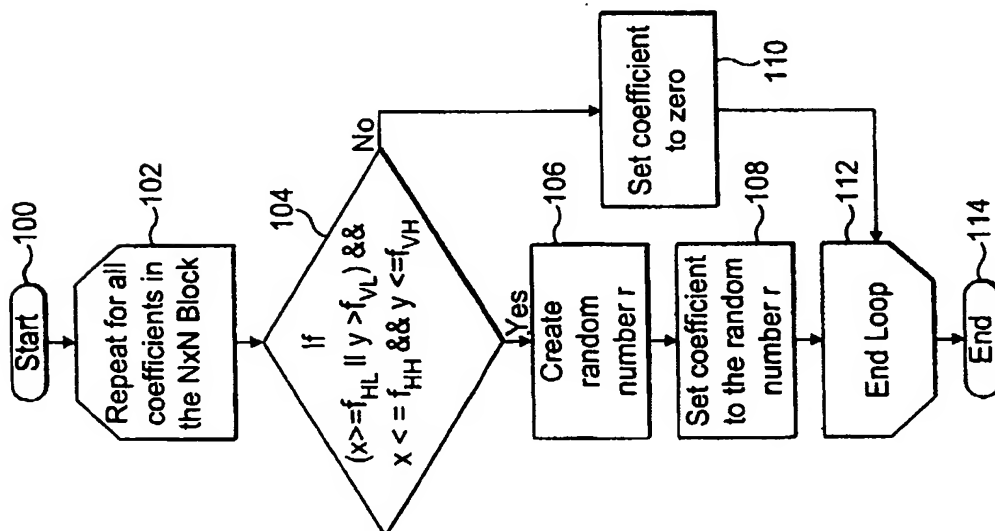


FIG. 2



3 / 3

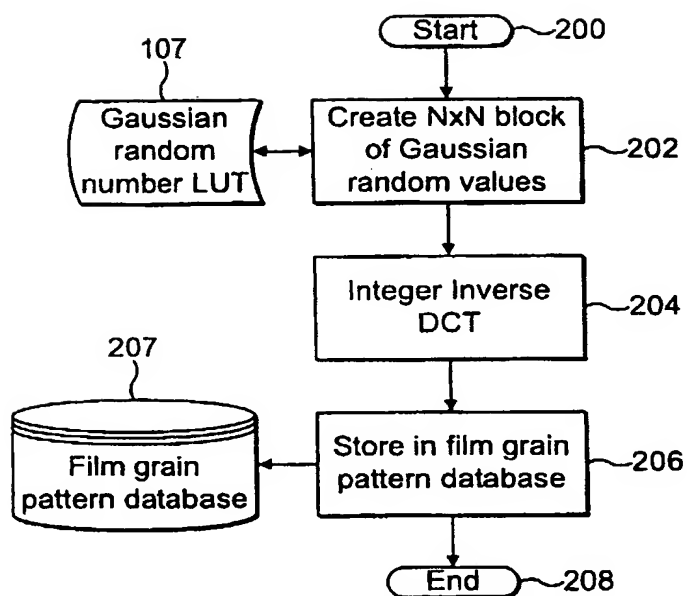


FIG. 4

# INTERNATIONAL SEARCH REPORT

Intern Application No  
PCT/US2005/034723

A. CLASSIFICATION OF SUBJECT MATTER  
H04N7/26 G06T5/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H04N G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	EP 1 511 320 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD) 2 March 2005 (2005-03-02) paragraphs '0068!', '0069!; figure 8 -----	1
X,P	WO 2005/027045 A (THOMSON LICENSING S.A; GOMILA, CRISTINA; LLACH, JOAN) 24 March 2005 (2005-03-24) page 4, lines 19-27 -----	1
X,P	WO 2005/032143 A (THOMSON LICENSING S.A; LLACH, JOAN; BOYCE, JILL, MACDONALD; TOURAPIS,) 7 April 2005 (2005-04-07) page 7, lines 3-7; figures 2,3 ----- -/-	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

19 December 2005

Date of mailing of the international search report

03/01/2006

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer  
  
Lockett, P

# INTERNATIONAL SEARCH REPORT

Inter ☐ Application No  
PCT/US2005/034723

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	WO 2005/034518 A (THOMSON LICENSING S.A; GOMILA, CRISTINA; LLACH, JOAN; BOYCE, JILL, MAC) 14 April 2005 (2005-04-14) page 5, line 26 -----	1
X	WO 2004/095829 A (THOMSON LICENSING S.A; GOMILA, CRISTINA; BOYCE, JILL, MACDONALD) 4 November 2004 (2004-11-04) the whole document -----	1-20

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern

Application No

PCT/US2005/034723

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1511320	A	02-03-2005	NONE	
WO 2005027045	A	24-03-2005	NONE	
WO 2005032143	A	07-04-2005	NONE	
WO 2005034518	A	14-04-2005	NONE	
WO 2004095829	A	04-11-2004	NONE	